

Flexible 4.0mm (.155") diameter Industrial Fiberscope with Tip Articulation

# Model FS-155 - *SEE INSIDE*



for Internal Visual Inspections



The OPTIM Model FS-155 High Resolution fiberscope meets the remote visual inspection needs for those who require a small diameter flexible instrument. The FS-155 is designed to provide superior imaging without hazy, blurry, off-color internal views. This versatile scope can access small engine ports and its tight bending radius plus articulation enable critical internal visual inspection maneuverability.




- ◆ **Eyepiece**  
Adjustable Diopter 20/20 Vision Correction  
Ability to adapt to 35mm, digital or video camera
- ◆ **High Resolution Glass Fiber Image Bundle**
- ◆ **Single Hand Control**
- ◆ **2-Way Articulation 120° up /120° down**

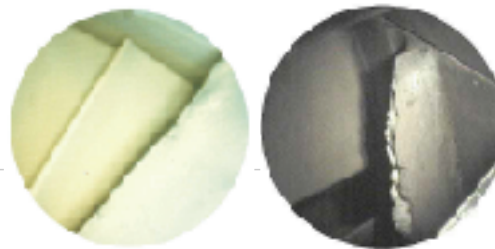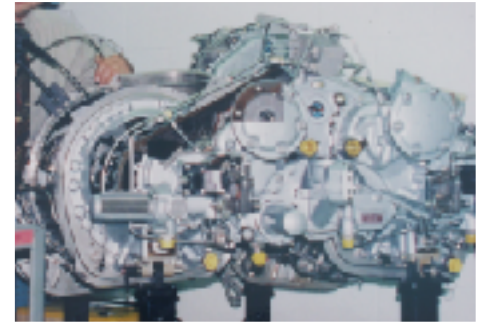

## Specifications

Diameter	4.0mm (.155 inches)
Two Lengths	51cm (20 inches) & 102cm (40 inches)
Articulation	120° up/120° down
Shaft Cover	Tungsten Braid
Shaft Immersible In	Water, Fuel
<b>Optical</b>	
Depth of Field	6-100mm (.24 - 4.0 inches)
Field of View	45°
Magnification	40X
Light Guide Type & Length	Integral 152cm (60 inches)

OPTIM Incorporated reserves the right to change product specifications without notice.

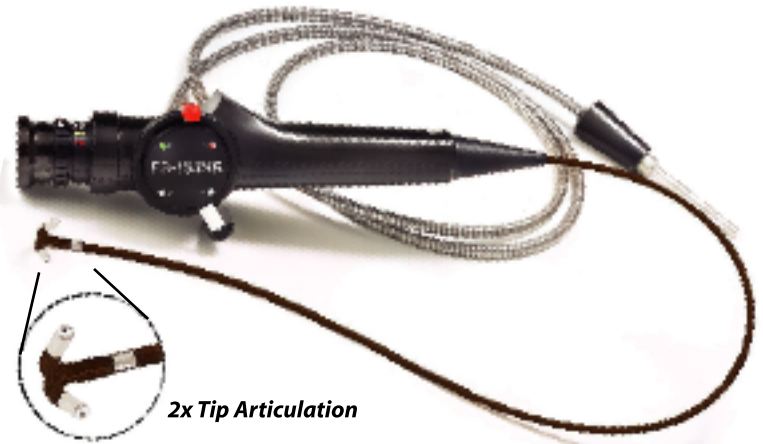

## FS-155 Fiberscope Kit Includes:

FS-155, Carrying Case, Operator's Manual, Light Guide Adapter, Eye cup, Lens Cleaner and Lens Cap

Order Kit Part Number 41209321 for 20 inch scope length

Order Kit Part Number 41209311 for 40 inch scope length

*FOR ACCESSORIES, OPTIONAL AND REPLACEMENT ITEMS PLEASE REFER TO ACCESSORY SHEET*

*OPTIM recommends the MS-24 or MS-48 light source for illumination.*



This product was manufactured in a plant whose quality management system is certified/registered as being in conformity with ISO 9001.



OPTIM INCORPORATED  
64 TECHNOLOGY PARK ROAD • STURBRIDGE, MA • 01566-1253 • USA  
PHONE (800) 225-7486 • +1(508) 347-5100 • FAX +1(508) 347-2380  
www.optimnet.com • sales@optimnet.com

06/04